

# THE ULTIMATE SLED

BY  
XCS INC.

MANUAL  
Rev. 4  
10/09



## Warranty

### **Please read before using your equipment**

Xtended Camera Support will warranty this product against defects in material and workmanship for a period of one year from the date of invoice. XCS will pay parts and labor charges to repair or replace any manufacturers defect under normal operating conditions. The buyer will be responsible for all shipping charges.

This warranty does not cover, nor will the manufacturer be responsible for, damages caused from abuse, misuse, negligence, accidents, cosmetic damage, or by acts of God. All warranties expressed or written will be voided if this equipment has been damaged by abuse, misuse, negligence, or accident.

Great care in engineering design has been made resulting in no serviceable parts inside this sled and monitor. Care must be taken when using all your equipment. One should protect it from water, dirt, shock, and excessive heat.

If you have any questions on care for any of this equipment, please call XCS and we will be glad to advise you on any maintenance of our equipment.

Proper care should be taken when shipping your equipment to protect it from shock damage. At least 2.0" of a 4 lbs. Ester foam (or equal) should surround your equipment at all times when shipping. Case design is made so that the case will absorb the impact and the case will give up its life, protecting the equipment inside.

Unlike any sled ever designed before, it takes a special and knowledgeable operator to understand the technical hurdles and advancements made with the Ultimate sled. We thank you for choosing it. We understand you have many options for sleds out there, and most of them are less expensive to purchase. However, an informed operator can quickly weed out all the competition, on every design feature, and only our company stands alone.

With proper care, this equipment will provide you with many years of service. Thank you for choosing Xtended Camera Support. We have only the operator in mind for all our designs.

# UPPER CAMERA PLATFORM


**Camera Dovetail Plate**



Allows for attachment of any camera with one plate design.

**Upper Camera Platform**

**Bottom view**

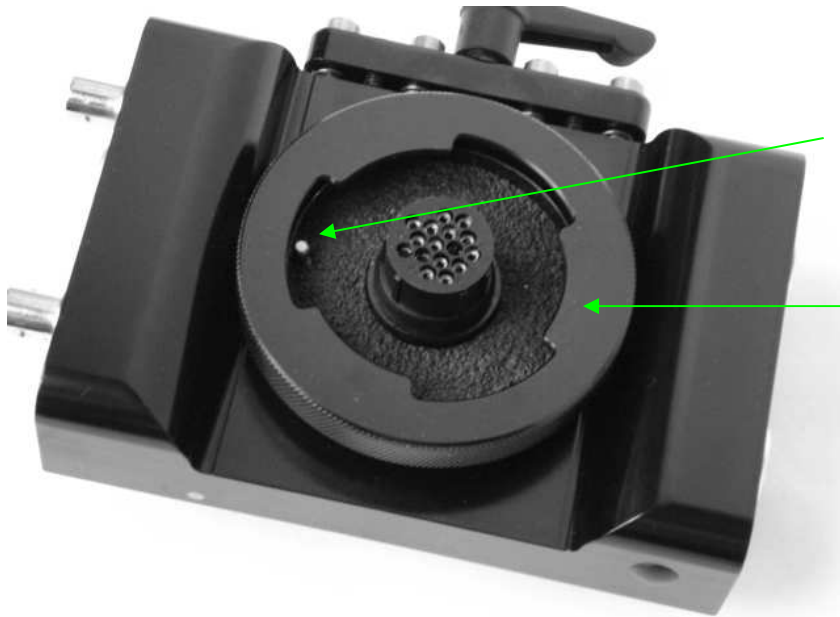

**Features:**

1 –Registration pin for the bayonet mounted post and camera platform.

2 – 16 pin connector.

3 – Bayonet mount locking ring. Turn to release the camera platform from the center post.

**Front view**



4 – Three 6-32 TPI tapped holes for lens remote receiver bracket.

WARNING: Screw depth not to exceed .25" into chassis.

5 – Left side BNC composite video input only.

6 – Lemo 0S 304 connector. Delivers 12 & 24 Vdc to lens remote.

7 – Lemo 1S 303 connector. Delivers 12 & 24 Vdc.

8 – Right side BNC HDSDI

### Rear view



- 9 – Lemo 2B 302 connector. Delivers an isolated 12 Vdc, camera power. (Optional wiring here)
- 10 – Lemo 0B 304 connector. Delivers a true 1v P to P signal video out and 12 Vdc out for a transmitter.
- 11 – Lemo 2B 303 connector. Isolated 12 & 24 Vdc from the 302 connector. Used for camera power.


### Camera left side view

Drop in style quick release upper camera platform. Kipp handle provided. If you are a tool type person, you can always use a 10-32 SHCS.



- 12 – Lemo 0B 304 connector. Dedicated video input. 12 Vdc output for video ass't cameras.
- 13 – 10-32 TPI Kipp lockdown handle.
- 14 – Camera platform locking dovetail clamp.

### Camera right side view

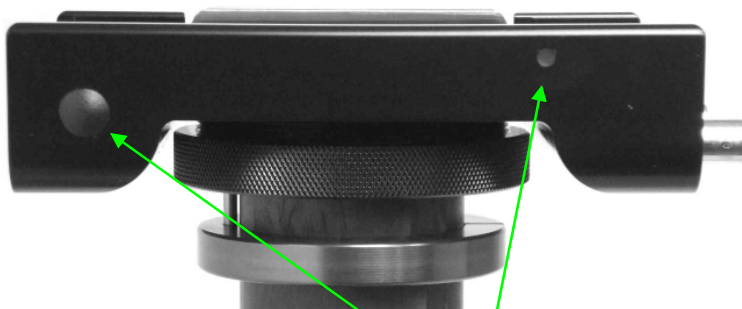

- 15 – 9mm tapped open port for future expansion.
- 16 – Camera plate safety pin.

**GIMBAL  
CARBON FIBER POST  
SUPPORT ARM**

## ULTIMATE GIMBAL

Care should be taken so your gimbal will provide you with many years of service and reliability. To adjust the gimbal up or down the post, simply turn the Kipp handle to loosen and move the gimbal into position, and retighten. You do not have to over tighten a gimbal lock on the carbon fiber post. Snug is generally significant enough and does not need as much force as you might be used to on other posts.

When you need to make small gimbal height adjustments, I have found that turning the gimbal sleeve a little bit like a screw, helps makes small adjustments very easy.

One of the many unique sleeve design features is the symmetrical contours. This gives the operator the same feel when operating in either high or low mode. The symmetrical fork design allows considerably more hand room under the gimbal fork in normal mode. You will never have to worry about pinching your thumb on the fork in low mode.

Precise alignment of all three axis, no tools balance adjustment, complete interchangeability of components has made this gimbal the most popular interchangeable gimbal on the market.

On the standard 115 degree gimbal handle is the 10-32 locking screw which is used for tightening the gimbal handle on to your post in low mode. Under the foam grip is the standard .1875" through hole in this handle. If you like to use a safety pin as well, I would suggest using a soldering pencil to melt the small hole through the foam grip. If you are using the Ergo handle you will not need the locking screw because you do not flip the handle over for low mode work.



### **Gimbal Cleaning, Care & Sleeve Removal**

You will find that you most likely will not be disassembling your gimbal and cleaning it very often. In fact, it may be years before you would need to do it if at all.



Use the gimbal wrench and place on gimbal cover. Hold down as picture shows and turn to remove gimbal dust cover. A light tap with a plastic screwdriver handle may be necessary. It will take about 5 revolutions to remove cap. Hold the gimbal upright when removing cap so not to have the fork and bearing cup fall off the gimbal sleeve. Using the same gimbal wrench, remove the side dust covers on the gimbal fork. This will reveal the two fork bearings. It is not necessary and not recommended to remove the bearings for cleaning.



When removing the fork & bearing cap from sleeve, be careful to slide it off evenly. It is a perfect fit. **DO NOT PRY OR TAP THE FORK OR BEARING TO REMOVE OR DISASSEMBLE FROM SLEEVE.** If the bearing does not remove from sleeve smoothly, put it in the freezer for 20-30 minutes, this will allow the bearing to be removed from the gimbal sleeve.

When cleaning the bearings in the field a pressurized non-lubricated spray contact cleaner works perfectly. You can also use an automotive pressurized can of spray carburetor/brake cleaner. Be advised to wear eye protection when using any pressurized cleaner. I would spray all bearings both sides well one or two times. After that I would spin the bearings and repeat the spraying again to remove any left over dirt. After spraying let the gimbal set and dry, 2-3 minutes. At this time it would be good to clear the gimbal sleeve and dust covers.

Lubricate with the oil of your choice. We use a Castro synthetic bearing lubricant, but any type of lubrication will work. Place a few drops on all the bearings and spin the bearings to work the oil into the cage. This oil will fly out when you spin it, so be forewarned.

Wipe lubricant on the bearing journal on the gimbal sleeve, I use a Q tip for this. Wipe on a small amount of lubricant for easy assembly.

Insert the bearing cup onto the gimbal sleeve and reassemble in reverse order. Once again I would give a light tap on the gimbal wrench to tighten the cap on the sleeve.

We do not and do not recommend using any type of thread locker on these threads.

If you have trouble putting the bearing cup on the journal, again stick it in the freezer for 20-30 minutes and it will slip into position.

### **Gimbal handle removal, replacement**

Before you replace your gimbal handle, take your new handle and inspect the spindle end (tapered end portion that fits into the gimbal fork). Make sure the tapered portion has no dents, scratches, or marring of any kind. If it does, do not use this spindle.

### **To remove the handle, please follow the instructions below.**

- 1) Remove gimbal from the sled post. With clamping end of the gimbal facing up, insert 9" hex head wrench provided through the gimbal handle sleeve into the hex head screw in the gimbal fork.
- 2) Remove the screw that holds the fork on the gimbal handle and set it aside. The fork should separate from the spindle cleanly. If the handle is stuck on the spindle, you might re-insert the screw half way and tap the top of the hex head wrench. This will disengage the stainless steel spindle shaft from the fork.

### **What to do if the spindle is turning while you turn the hex head screw.**

If this occurs, press down slightly on the fork with your index and middle finger next to the hex head screw as you turn the wrench. This will put slight pressure on the spindle and hold it while you loosen the screw.

3) Reassemble in reverse order. You do not have to use Loctite on the 10-32 screw that attaches the fork to the handle, but if you decide to, use a non-permanent Loctite (#222) on gimbal fork screw. Do not over tighten this screw. The recommended maximum inch/pounds is 28 on this stainless steel screw.

### **Other notes:**

We use a Heilcoil insert on the threads of the gimbal sleeve to prevent possible damage to the sleeve itself. If you replace the Kipp handle, we recommend not using hardened steel screws. Over a period of time these could damage the thread insert.

If you wish to remove the Kipp handle and use a standard hex head screw, a 10-32 TPI screw size and .625" long should work fine. The gimbal comes with spare screws.

When tightening the gimbal handle onto the fork. **All 10-32 stainless steel screws should not be tightened more than 31 inch. lbs.** This is 100% torque on this type of stainless steel screw. Manufacturers recommend 75-80% of maximum torque, which is 23.25 in. lbs.



## Bayonet mounted Carbon Fiber Telescoping Post

End view of the mount that contains the 16 pin connector.



Never before has changing center posts been so quick and easy. When connecting or disconnecting the center post, there is never any need to connect or disconnect wires inside the post. The post itself contains a custom designed cable, with 16 conductors.

Our custom coiled cable contains correct wire gauge sizes for power, 75 Ohm video and signal wires. This sled is the first design to have all correct power and video termination on all inputs and outputs.

2" post is custom wound carbon fiber filament to assure maximum post rigidity. This allows the operator to feel solidness like never before. Currently, this post is up to 15X more rigid than current aluminum designs.


To assure maximum integrity in the center post, there are no slots or grooves cut into the inner or outer posts. This allows you to spin the outer post around the inner post. Maximum 360 degrees. One needs to be careful not to spin the tube more than 360 degrees or uncoiling the inner-coiled cable would make telescoping and contracting difficult.

This tube is permanently sealed and there are no serviceable components inside the post. Be extremely cautious not to bend or break the protruding connector pins.

To align your upper camera platform and lower electronics housing, simply align the rule markings on the post with the slot on the center post clamp.

There is a safety stop located inside the post preventing the system from pulling apart.

XCS Inc.

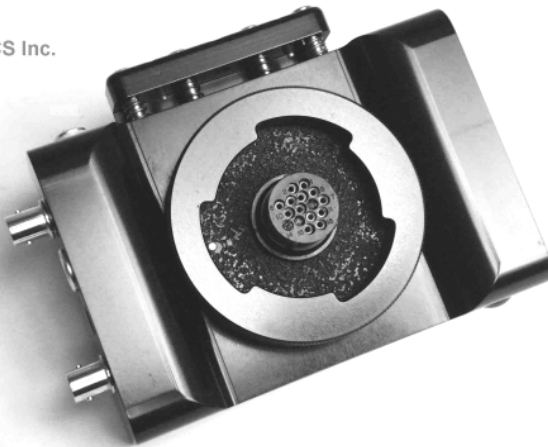

### Connecting & disconnecting the center post.

The bayonet mounted design allows for quick positive locking of your center post.


There is a registration pin on the receiving mount, as well as registration keys on your connectors, that assure correct alignment. All that is needed is to slide the docking ring down the post and spin off the bayonet locking ring to release the center post. It truly takes a few seconds.

**CAUTION:** After removing your center post, be careful not to damage any of the mating pins or plugs by sticking objects into them. Do not reassemble the post if a pin is damaged. This will cause further damage to the mating pin. The design of the system assures that the bayonet mount and alignment slots on the connector

engage before any pins make contact. Mating cable connectors are designed to have a few degrees of movement in them. This allows for quick, easy assembly.

## DUO ROD MONITOR SUPPORT ARM

5.5" telescoping range, other lengths are available upon request.

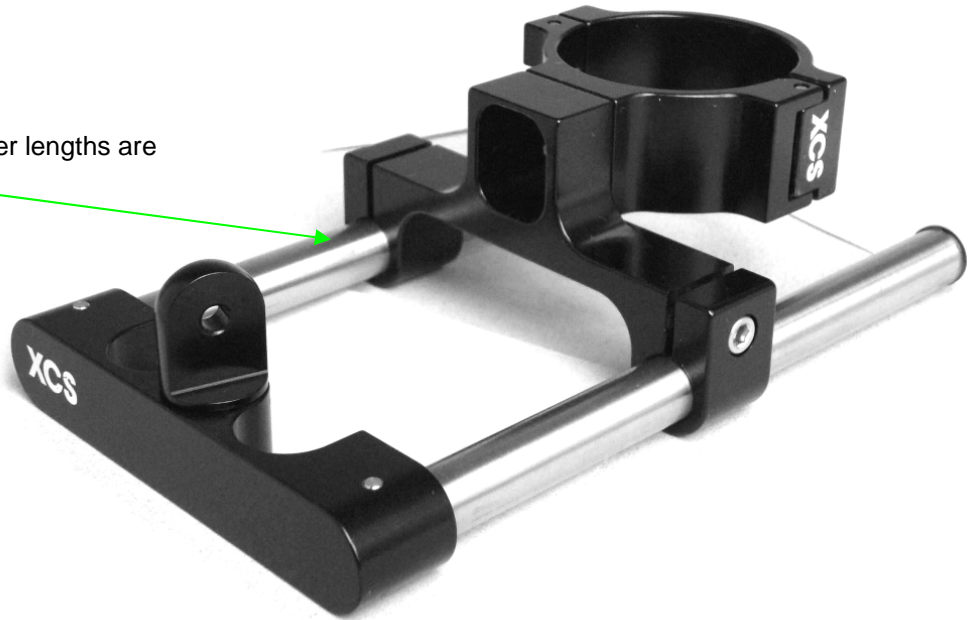

The telescoping monitor support arm allows you to spread out your sleds inertial masses for better sled stability. Example a nice long walk and talk down a hallway or road. When you spread out the mass weight in horizontal position, keeping the weight as far from the gimbal as possible, this will help smooth out any sudden but perceptible movements transmitted into the yaw. Or, on those windy days, moving your monitor and batteries out increasing your panning inertia allowing your system to glide along instead of being thrown about by the wind gusts. The two hex head screws on the side of the clamp when loosened allow you to move your monitor in and out.

When flipping your monitor into low mode, operators need only to loosen the Kipp handle on the center post clamp, then flip your monitor over and reattach moving it closer to the gimbal. This will ensure you have a clearer view of the monitor screen.

There is an 8-32 Phillips FHMS located on the inside of the post clamp. If you wish to have the locking clamp rotated to the other side, simply loosen the Phillips head screw, remove the split clamp, flip it 180 degrees and press it on lightly and attach the screw with a bit of nonpermanent Loc-tite.

Once again we use 10-32 TPI Kipp handles on the sled. If you wish to replace the Kipp handles you will need the 10-32TPI screws, different lengths for different applications. A set of these spare screws are provided with the sled.

# **LOWER ELECTRONICS HOUSING**

## LOWER ELECTRONICS HOUSING



This view of the lower electronics housing shows the three battery positions. The rear two battery positions starting with the top most plate is, #1 and #2 is on the bottom, both ride on two ½” rails. This rear battery position is adjustable in and out by loosening the two lock screws just in front of the rear battery housing. The 3<sup>rd</sup> battery position is below the electronics housing itself. These battery positions will correspond with the three individual LCD displays. The LCD display will show the percentage of available capacity left in each of the three batteries, when you are using interactive batteries. There will be a fourth display showing you the total voltage of all the batteries powering the system.

Any battery can be in any position at any time.

*\*Sled wiring options may isolate one battery from the battery management system.*

It is not necessary to use multiple batteries to achieve 24 volts with the ULTIMATE 1 sled. Our custom designed power supply provides you with both 12 and 24 Vdc at all times.

You can choose any battery cell type, chemistry and voltage up to 18volts.

We designed our lower electronic and battery housing as compact and as far away from the gimbals center of balance as possible. This allows you to run a single battery on your 24 Vdc camera, making the ULTIMATE the lightest film production sled built.

### **Battery Plate Options**

We will supply the ULTIMATE sled with your option of either Anton Bauer gold mounts, PAG or \*IDX V mount battery plates. If you like you can mix them. Currently, our Battery Management System BMS will display the total battery voltage of all combined batteries into the system and up to 3 individual remaining battery capacities from the Anton Bauer Interactive batteries on the LCD display. It will also display the total voltage of any battery and all types and manufacturers on the sleds display.

\*IDX V mount plates have an additional minimal charge for them.

### **Sled Wiring Options**

We give you 3 different sled wiring options. These options are offered because of the introduction of the much higher current draw 12 volt cameras like the Panavision Genesis, F35, when you need two batteries. If you think that you will be running these cameras in the future you might consider option 2 or 3. Remember any option you choose can be changed at anytime.

1) Standard wiring so that all three battery plates deliver power to the battery management system. All batteries are monitored and drawn down equally and displayed on the LCD.

2) Any one battery plate is direct wired to the upper camera platform's auxiliary camera power connector, Lemo 2B 302. This will deliver direct power from the battery and not be connected to the battery management system. This will allow you to run all cameras at all times.

3) All battery plates are direct wired to the upper camera platform's auxiliary camera power connector, Lemo 2B 302. This will deliver direct power from the battery; *it will be* connected to the battery management system and monitored normally. This will not allow you to run the ARRI 3 cameras at high-speed only (past 60 fps) because of the common ground. Pan/ Arri's are not affected because they are 24VDC power inputs and can be run up to 120 fps without issue. All batteries will be monitored normally by the battery management system. All other cameras can be run at all times on the sled like option 1.



**Pushbuttons left to right:**

**MAIN PWR:** Turns your system on and off.

**STDBY:** Puts your sled into low power consumption mode.

**ZERO:** Always active, reZERO's your Programmable Digital Level at any angle with a press of the button.

**LEVEL:** (*Optional*) Allows you to enter the User programmable settings of your level and crosshair. (See digital level chapter for details)

**SLED :** Allows you to enter the User programmable settings for the Battery Management System, Sled controls, Uno frameliner control and Recorder power.

**SELECT:** Scrolls through your programmable menu pages.

**ADJ:** Scrolls through and selects your settings for that programmable page.

**Releasing the post from the Lower Electronics Housing ( LEH)**

To remove the post from the LEH you simply turn the knurled locking ring. The mount on the housing is designed to turn +/-5 degrees, connector in the post as well is designed to turn. Registration pin on housing, alignment slots on connectors will assures correct alignment of post and connector.

**LOWER ELECTRONICS HOUSING FRONT PANEL CONECTORS**



Three Lemo connectors, left to right.

**1B 308:** feeds power, tach, video and tally light information to the TB-6 Smart Monitor.

**0B 304:** feeds 12 Vdc out, and video signal out only. For transmitter, 1A maximum.

**2B 303:** 12 & 24 Vdc out.

**BNC:** HDSDI

**LOWER ELECTRONICS PROGRAMMABLE FUNCTION AND USER PROGRAMMABLE CONTROLS**

The following is a description of the programmable functions that are available on the ULTIMATE sled. First, a brief summary on how to enter each menu, each programmable page and how to select the setting for that page.

Second later in this section there will be a list of definitions of each of the programmable pages and it will tell you exactly what each of those page functions are.

The following brief descriptions will cover the standard features which include the Battery Management System, LCD Display, and Uno functions and setup. It will also cover the optional Programmable Digital Level, Crosshair.

What the Battery Management System (BMS) allows you to do is to simply run your sled on one, two or three batteries. It will deliver the correct voltages to the appropriate plugs, monitor and display total voltage of the incoming batteries, and when using interactive batteries, will display percentage of remaining capacity of each battery plugged in. We have designed all our own software for this function, which is completely different and far more useful and trusting than a display on the battery.

First, you will need to power up your system, so you will need a battery and a video signal present to access the full menu of programmable settings.

When you press the power button, up will pop the yellow power light, the LCD display will say XCS ULTIMATE and our web page. This will take about three to four seconds and will disappear. The battery displays will then appear.

You are now ready to enter one of the programming menus.

### **MENU** pages.

You have five different main menus to choose from. Within those five main menus you have submenus. These submenus are your user selectable pages for programming.

5 main menus are as follows:

- 1) LEVEL, *optional*
- 2) CROSSHAIR, *option comes with level software.*
- 3) SLED
- 4) UNO FRAMELINER
- 5) DECK

To enter the five main menus you have two pushbuttons, **LEVEL** or **SLED**. The Programmable Digital Level Plus is an option, so if it is not built in you will not have the level functions.

The **LEVEL** pushbutton allows you to enter the optional **PDL** and **+HAIR** (crosshair) menus. The **SELECT up/ down** buttons allow you to enter those submenu pages, while the **ADJUST up/ down** pushbuttons allow you to select your settings for that page.

Editing is a simple three step process:

1. Choose your **MENU**
2. Use the **SELECT** button to find your programmable page.
3. Use the **ADJ** buttons to program your settings.

The **SLED MENU** button allows you to enter all the other sled menus. The **SELECT** buttons allow you to enter those sub menus which include the LCD visual display, BMS, record deck power supply, and the Uno. Once again the **ADJUST** up/ down pushbuttons allow you to select your settings for that page.

*All programmed settings on the ULTIMATE sled are always saved in nonvolatile memory.* This means that whenever you turn your sled off, pull off the batteries, pack it away for a month and bring it out and power back up, it will remember all the previous settings.

When editing any of the pages, your LCD display will prompt you of all your current settings for that page and display your options for that page when you use the up and down **ADJ** buttons to scroll through your options. Also, if your TB-6 is turned on and a video signal is present, the same information will appear on screen.

You can edit any of the **SLED** functions with no video signal present.

You cannot edit any of the **LEVEL** functions without a video signal present.

*Example – You want to turn on the backlight OFF, on your LCD display.*

*Go to the **MENU** buttons, press the sled button once.*

*The LCD display will display SLED LIGHT ON. Use the ADJ up or down key, press once and this will turn the SLED LIGHT OFF.*

*To exit that menu page, you have two options. You can choose another page to edit simply by pressing the **SELECT** keys, or you can let the microprocessor **time out**.*

**TIMING OUT.** Timing out is a term used to tell you that a pushbutton that was active (operational) is no longer active, “Timed out”. In our design you have 4 seconds to press a button, then it will automatically turn off if no buttons are pressed. Once you enter an edit mode by pressing one of the two **MENU** buttons, **LEVEL** or **SLED**, the **SELECT** and **ADJ** keys are automatically activated. The reason we do this is to prevent you from accidentally changing any of your settings.

The following buttons are always active when a battery power is present. **POWER**, **STANDBY** and **ZERO**.

Example – Under the **LEVEL** menu, there are two options.

- 1) **PDL**
- 2) **+HAIR** (crosshair).

To enter the **PDL** options, simply press the **LEVEL** button once.

Your **LCD** and your on screen text will display the first selectable page, **LEVEL**, and your programmable setting option which are **On** or **Off**. Turn it **ON**

To further select editable pages for the **PDL**, use your **SELECT** down button to scroll through your programmable pages using the **ADJ** pushbuttons to set you preferences.

To enter the **+HAIR** selectable pages, you would have to press the **LEVEL** menu button twice. Once again, your first selectable page **+HAIR** and your programmable setting option will be **On** or **Off**. Turn **ON**.

To further select editable pages for the **+HAIR menu**, use your **SELECT** up/down button to scroll through your programmable pages using the **ADJ** pushbuttons to set your preferences.

### ENTERING THE SLED MENU

Press the **SLED** button once.

Brings up the sled's control package. This includes the Backlight, Battery Management System, Serial # and Brightness.

Press the **SLED** button twice.

Brings up the **UNO**.frameline

Press the **SLED** button three times.

Brings up the record **DECK** options

*\*You should always leave the Deck powered up either at 4.5 or 7.2 Vdc.*

The **SLED** menus can be edited at any time with or without video signal present.

### USER SELECTABLE PAGES & PROGRAMMABLE SETTINGS

If you press the **SLED** menu pushbutton one, two or three times these will be your following options:

**Pressing the SLED menu button once brings up the following submenu under the SELECT pushbuttons.**

SELECTable pages (SELECT keys)

Programmable settings (ADJ keys)

**SLED LIGHT**

**ON / OFF**

**SLED BATT %**

**ON / OFF**

**SLED BATT**

**12 / 13.2 / 14.4 VDC**

**SLED LO BATT**

**9.1 – 15.0 (User Adjustable)**

**SLED BRITE**

**LO / MED / HI / MAX**

*(also sets the frameline intensity on the UNO for transmitters)*

**InACT**

**OFF/5 / 10 / 15 MINUTES**

**ULTIMATE SLED SERIAL NUMBER #0000**

### PRESSING THE SELD BUTTON TWICE

**UNO** (single digital frameline for the transmitter only, w/black border control on/off) When the **UNO** menu is selected and turned on, all other visual displays on your TB-6 will temporarily be turned off. The **DUO** inside the TB-6 will remain on. This will enable you to easily program the settings on your **UNO**. When you are finished editing the framelines, and you exit the **UNO** page, your previous TB-6 frameline settings on the monitor will return. These **UNO** frame lines will be seen only at video village.

SELECTable pages (SELECT keys)

Programmable settings (ADJ keys)

**POWER**

**ON / OFF**

**LEFT** (moves left frame line)

move with the **ADJ** keys

**RIGHT** (moves right frame line)

move with the **ADJ** keys

**UPPER** (moves top frame line)

move with the **ADJ** keys

**LOWER** (moves bottom frame line)

move with the **ADJ** keys

**BORDER**

**ON / OFF**

## PRESSING THE SELD BUTTON THREE TIMES

**DECK** (recorder)

**SELECTable pages** (**SELECT** keys)

**POWER**

**VDC**

**STANDBY**

**Programmable settings** (**ADJ** keys)

**ON / OFF**

**4.5 / 7.2 VDC**

**ON / OFF**

## PROGRAMMABLE DIGITAL LEVEL (PDL) MENU (optional)

**+HAIR MENU** (available only with the PDL)

If you press the **LEVEL** menu once or twice, these will be your following options. Remember, the **ZERO** button is always active. This means you can re**ZERO** your level at any time. Simply press and hold the button in, and on the screen of your **TB-6** you will see a message that says **ZERO WAIT**. In two seconds the message will say **ZERO SET**. This setting is now stored into nonvolatile memory. We offer you four visual displays under the style page for the **PDL**. Two vertical and two horizontal. When using the vertical style level, your **+HAIR** function is automatically inactive. You can only use the **+HAIR** with the two horizontal displays.

**SELECTable pages** (**SELECT** keys)

**LEVEL**

**MOVE**

**SWEEP**

**ZERO**

**RANGE**

**REACT**

**STYLE**

**SIZE**

**BRITE**

**BLACK**

**TILT**

**Programmable settings** (**ADJ** keys)

**ON / OFF**

**UP / DOWN**

**L TO R / R TO L**

**HMODE / LMODE / OTHER**

**+/- 1,2,4,8,16 DEGREES**

**SNAIL / SLOW / MID / FAST / HYPER**

**1 / 2 / 3 / 4**

**SMALL / MED / LARGE / XL**

**LO / MID / HIGH / MAX**

**HALF / FULL / OFF**

**ON / OFF**

**+HAIR** (crosshair)

**SELECTable pages** (**SELECT** keys)

**POWER**

**MOVE**

**MOVE**

**SIZE**

**LOOK**

**Programmable settings** (**ADJ** keys)

**ON / OFF**

**L R (LEFT TO RIGHT)**

**U P (UP OR DOWN)**

**SMALL / MED / LARGE / XL**

**WHITE / BLACK / ZEBRA**

## ULTIMATE SLED MENU PAGES AND DEFINITIONS OF EACH USER PROGRAMMABLE SETTING

SLED, UNO, RECORDER, LEVEL Menu's

Most of the programmable page titles are self explanatory by title. But here is a list of what options each page offers.

**SLED LIGHT** – Turns on and off the back light on the LCD screen.

**SLED BATT % - ON/OFF** – Turns on and off the visual display of your three individual battery percent remaining displays.

**SLED BATT 12 / 13.2 / 14.4** – Tells the microprocessor what voltage battery you are using.



**SLED LoBATT** – The programmable range is **10.5-15.0 Vdc**. This setting triggers your low battery threshold, programmable in 0.1 Vdc increments. Factory standard setting is 13.7 Vdc. ***This is very important to note:*** Because different battery chemistries, cell sizes, voltages, and battery age drop out at different low battery thresholds. NO single preset battery indicator will work for all batteries. This is one reason why we developed the **BATTERY MANAGEMENT SYSTEM**. You now have complete control to program into the microprocessor the battery voltage and at what voltage you would like your **LO** battery indicators to turn on at. The microprocessor in the BMS also very precisely measures the percent of your batteries remaining capacity. This will allow each individual operator a comfort zone on when to change out their batteries. The BMS will greatly increase the longevity of your batteries, and running time on your sled before you change out batteries.

**SLED BRITE – LO / MED / HI / MAX** – This is the brightness setting for your on screen text, Programmable Digital Level indicator and crosshair appearance on the TB-6. It also controls the frameline intensity on the UNO frameliner for your transmitters display.

**InACT – 5 / 10 / 15 / OFF** – This allows you to program into your sled a time **5, 10** or **15** minutes of sled inactivity to automatically turn itself off. When your sled sits idle, a sensor notices no movement and will power down your sled saving battery power. To turn your system back on, simply press the **POWER** button on the sled. If the **InACT** is in the **OFF** position, you will simply have to manually turn your sled off by pressing the **POWER** button. You can have your sled set to turn off at a specified time setting and still turn your sled off manually.

**SER#** - This is your sled serial number. We put this into the firmware and it cannot be removed and your sled still function. If your sled gets stolen, we will be able to track it when it appears on the market. Another nice feature we have added.

**UNO** – This is another nice development in our sled design. This is a completely positionable, digital white frameliner and border controller that is designed to work with your video transmitter only. The frame lines and border control will not be seen on your TB-6 monitor except for initial setup. The **UNO** is a kin to this but it only works with the video transmitter. So let's say on your TB-6 monitor the **DUO** is set up to show you, the operator, full academy and 1:85. You can show the director 1:85 only and black box out the rest of the image. You have a choice of white frame lines if the **BORDER** control is **OFF**, or a completely black **BORDER** if the **BORDER** controller is in the on position. *Since this image like all our designs is digitally controlled, it will not drift.*

**UNO – PWR ON / OFF** – Turns the power on or off to the **UNO** display.

**UNO – LEFT** – Moves the left frame line.

**UNO – RIGHT** – Moves the right frame line.

**UNO – UPPER** – Moves the top frame line.

**UNO – BOTTOM** – Moves the lower frame line.

**BORDER – ON / OFF** – Turns on the black box outside the set frame lines in the **ON** position. Turns off the black border and allows video image to pass, viewing only the white programmable frame lines.

**DECK POWER – ON / OFF** – Turns on or off the internal power supply feeding power to your on board deck.

**DECK VDC** – Choose a supply voltage of **4.5** or **7.2 Vdc** out for powering your on board recorder.

**DECK STANDBY – ON / OFF** – Choose the ON position and when you put your sled in the STANDBY mode, you will not be able to power up your on board recorder for playback. In the OFF position, you will be able to do video recorder playback in this position in the STANDBY mode. But the system will put the rest of the sled except the TB-6 in low power mode.

## **PDL's PUSHBUTTON CONTROLS & SETTINGS**

6 Pushbuttons control: Level menu, Select, ADJ buttons, Zero

**Level:** Enters the Level menu pages.

**ZERO:** The ZEROing process requires the ZERO pushbutton to be pressed and held in for about 2 seconds. This is a safety feature to prevent accidental resetting. By pressing the ZERO button, immediately a message will appear on screen saying ZERO WAIT, after 2 seconds of being depressed, the message will say ZERO SET, the bubble will align to the center tick mark. If the button is released before the ZERO SET message appears, nothing will happen. The ZEROing button is functional at all times.

**SELECT:** The SELECT pushbuttons scrolls through a list of user menu pages. With each press of the button, your on screen text will display the current selected menu page. Example: line may read – RANGE, TILT, MOVE, REACT.

**ADJ:** ADJ pushbuttons allow you to control the setting available on the SELECTed page when the visual text is on screen.

## **PDL's MENU PAGES & USER PROGRAMMABLE SETTINGS**

**LEVEL:** ON / OFF. Pressing the ADJ button turns the level on/off.

**RANGE:** +/- 1,2,4,8,16 degrees. Each press of the ADJ button scrolls you to the next setting up to +/- 16 degrees. It does not roll over to +/- 1. You must use the DOWN button.

**BRITE:** LO / MID / HI / MAX. Each press of the ADJ button sets the next higher or lower setting of video brightness. The four settings LO / MED / HIGH / MAX, correspond approximately to 50 / 100 / 150 / 200 percent of the current white level. This is here to boost the levels of visual intensity through the border intensity control on the DUO DIGITAL FRAMELINER.

**SIZE:** SMALL / MED / LARGE / XL. Using the ADJ buttons allows you to adjust the levels visual size.

**MOVE:** ADJ. When in a horizontal level display, allows you to move the level over the entire video field. When in a vertical level display, allows you to move the level left and right over the entire field.

**ZERO: HMODE, LMODE, OTHER.** These are three levels of programmable memory. Every time you press the reZEROing button, your level setting has been stored on one of your selected levels of memory – HMODE, LMODE, or OTHER. You choose which memory level you wish to store your level setting on. If you wish to store a level setting on a specific memory level, use the up and down push buttons to bring up the memory level you wish to save it in HMODE, LMODE, or OTHER. A text box will appear on your monitor screen displaying which of the three modes you are in. To bring back a stored level setting, simply use the up or down buttons to bring up the memory level you previously saved. The level will automatically bring up that stored setting. You do not have to press the reZEROing button.

**SWEEP:** L \_\_\_\_ R / R \_\_\_\_ L. Toggling the ADJ buttons results in the reversal of the on screen levels bubble orientation between left & right, and right & left.


**REACT:** SNAIL / SLOW / MID / FAST / HYPER. Using the ADJ buttons you can adjust the bubble levels rate of response time to off axis movements. 1/125, 1/90, 1/60, 1/30, 1/15 of a second Using this dampening control in conjunction with the RANGE control, you will be able to find a nice physical & visual response of the level for yourself.

**STYLE:** 1 / 2 / 3 / 4. Use the ADJ buttons to choose between four different visual display styles. Two horizontal, and two vertical displays. On the horizontal displays, you will notice one center point (middle point or ZEROed) and tick marks at the end of the visual display. These tic marks represent the +/- RANGE setting of the level. The bubble will travel beyond these marks, up to +/- 90 degrees. But the tic marks represent your programmed RANGE setting +/- 1, 2, 4, 8, 16 degrees. This non linear scaling will produce far great accuracy and sensitivity in the critical range.


Example:

Visual STYLE 1

You have programmed the RANGE to be set at +/-2 degrees.

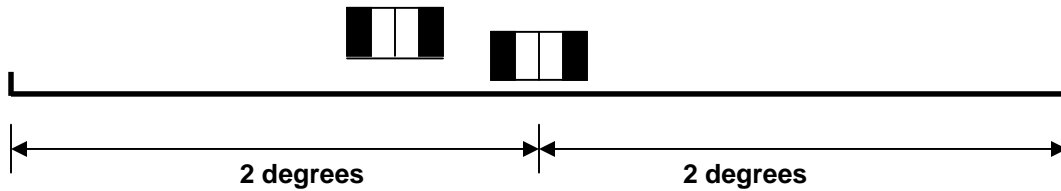

Visual STYLE 2

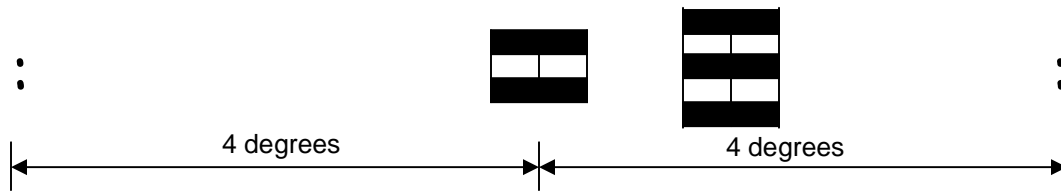


Visual STYLE 3 & 4

STYLE 4 is in the vertical mode.

Range setting at +/-4 degrees.

The vertical level indicator has no tic marks. You cannot BLACK boxed or TILT the indicator. It produces its own black box as it stretches out to visually show you're off level. If you are perfectly level, the indicator will look like a white rectangular box. If you go off level, it will stretch into a black rectangular box with white indicators going in opposite directions.



**BLACK:** OFF / HALF / FULL. The BLACK box function turns on / off a black background behind the level. It can be set to HALF, which is just the bubble height and length of the indicator or FULL, which is the bubble, grid & length of the indicator across the screen. This allows an extremely high degree of visibility with a low level of (BRITE) intensity.

**TILT:** ON / OFF. When ON, a tilted bubble gives a definitive indication of the sled deviation from true vertical. This may be helpful in the operator response time representing the orientation of the sled position and their need to tilt back in the other direction to bring it back to level.

**+HAIR** – This is the programmable crosshair that is displayed on your TB-6 screen only. It will not be transmitted.

**+HAIR – PWR ON / OFF** – Turns on or off the visual display of your crosshair. Remember, the **+HAIR** function is automatically turned off if you use either of the vertical PDL displays.

**MOVE – L / R** – Allows you to move the crosshair left and right.

**MOVE – U / D** – Allows you to move the crosshair up and down.

**MOVE – SMALL / MED / LARGE / XL** – Changes the visual size of your crosshair.

**MOVE – LOOK BLACK / WHITE / ZEBRA** – Changes the look of the crosshair from a black to a white or combination of both.

#### **OTHER LCD DISPLAY MESSAGES:**

**STANDBY** – Blinks **STANDBY** and **NO VIDEO** message when you have put your sled into low power consumption mode. A touch of the standby button on the sled will bring everything back up.

**LO BATT** – This will appear when your batteries have depleted past their programmable low voltage threshold setting.

**NO VIDEO** – this will appear when the sled does not receive a video signal. It also will appear when you put your sled in the standby mode.

**FAIL MEMORY TEST** – This will appear if there has been a powering up issue. Power down your system, remove batteries, press the power button once or twice, put the batteries back on, re-power your system.

**MEMORY ERROR TRY POWER OR RESET** – If your LCD displays this information, re-power your system, remove your batteries and re-power your system, or re-power your system doing a factory reset.

#### **LOWER ELECTRONICS HOUSING AMBER L.E.D.'s**

**MAIN PWR** – This lets you know that your system is powered up.

**LO** – Low battery Indicator blinks when your battery drops .01 Vdc below your programmable battery threshold.

**STANDBY** – Turns on when you put your sled into low power (sleep) mode. You may notice your sled's three yellow LED's blinking very faintly every few seconds. This is normal. It is your microprocessor scanning and watching for any kind of programming changes.

#### **MONITOR SCREEN DISPLAYS GENERATED BY THE L.E.H.**

The lower electronics housing generates an on-screen low battery indicator when your battery voltage drops below your preset battery threshold. It will appear in the lower left hand corner of your monitor screen. Visually, the indicator will be a small white box that looks like a battery with a plus sign in the center. It will blink about every two seconds and remain on screen until you change out your battery. Periodically you may see the low battery indicator pop on and off screen when you start up a motion picture camera. This is indicating that your battery is dropping below your low battery threshold and as your camera gets up to speed it goes back to normal operation and your battery does not have to work as hard. Typically, a Nicad will drop about .1 to .2 of a volt. A Hytron will drop between .6 and .8 of a volt on camera start up. Lithium .2-.4 volts. This voltage drop will vary between cameras.

#### **RESETTING THE ELECTRONICS BACK TO FACTORY STANDARDS:**

A video source is required to reset your electronics back to factory presets.

With battery installed, and system turned off, press and hold the **STANDBY** button down.

While holding the **STANDBY** button down, turn on the main power. Continue to hold the **STANDBY** button down for approximately 15 seconds. At first, the LCD display will display:

**The XCS ULTIMATE**  
**[www.xcsinc.com](http://www.xcsinc.com)**

When the reset is finished, the backlight will flash on and the battery voltages will appear. You may now remove your finger from the **STANDBY** button.

## LCD DISPLAY



The LCD display is capable of reproducing 2 lines of 16 characters each. This is why we have abbreviated some of the page names.

.The SLED & LEVEL menu information will be reproduced on the TB-6 Smart Monitor and on the LCD.

In non-edit mode, the LCD will display the status of the Battery Management System.

This mode tells the user the total voltage into the system on the top left hand side. It does not matter what voltage or battery type is used. This simply tells you the total voltage into the system of 1, 2, or 3 batteries.

If you are using interactive batteries, the next three readouts are of the individual batteries on your sled.

If you are not using interactive batteries, then you probably would like to turn off the three individual battery readouts so you are not looking at three sets of zero's. This will not affect the total voltage readout. This total voltage reading will remain on screen.

To turn off the individual readouts go to the

**MENU** press

**SLED** press

**SELECT** to bring up the **SLED BATT %** press

**ADJ** to toggle **ON** or **OFF**

## MAINTENANCE OVER TIME

It's inevitable that over time you will have to do a bit of adjustment or replace a screw or Kipp handle. The following information may be useful.



### ADJUSTING THE DOVETAIL CLAMP

If you find that your camera plate is sliding or the clamp is hanging up on the four shoulder bolts, the clamp's two brass tipped set screws are out of adjustment and need to be reset.



- Locate the two set screws on the side of the dovetail clamp, back them out 2 turns.
- With a dovetail plate in the platform, snug up the clamp using the Kipp handle. Do not over tighten it as if you are clamping it down, just snug so it takes a bit of end pressure to slide the camera plate in the camera platform.
  - Flip the UCP over (leaving the camera dovetail plate snug) and turn the two set screws in equally.
  - Snug up both brass tipped set screws. I measure the distance of the gap with a caliper and keep it close. You might want to put a thread locker on these set screws to keep them from moving.
  - Tighten up the Kipp handle with normal finger pressure and make sure that the camera plate does not slide. If it does slide, loosen the Kipp handle again back out the set screws a very small amount - 1/10th of a turn at a time each set screw, remeasure the gap, tighten the Kipp handle. Repeat if necessary. I set the gap +/- 0.001" measured at each set screw when manufactured.

### Swapping/ replacing the inching Knobs side to side

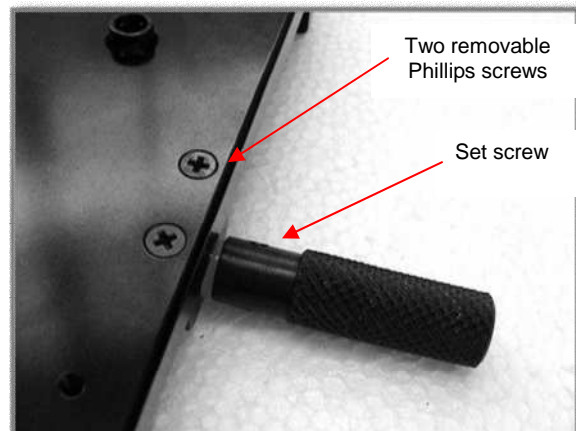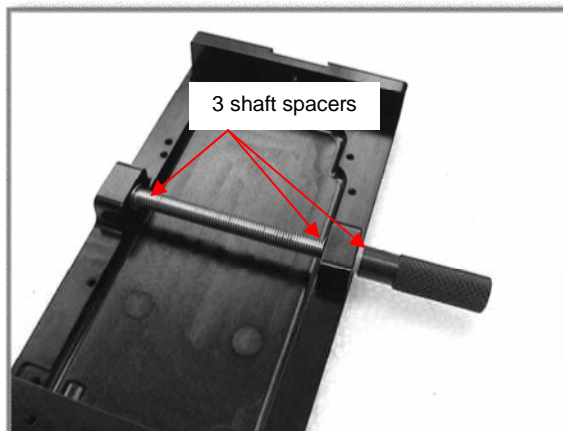

The first photo is a cutaway of the LEH and shows you how the shaft sits. It does screw through a plastic nut in the center (not pictured) of the upper half of the LEH. This means you will have to turn out the drive shaft and turn it back in.


There are three spacers on the drive shaft. One on the inside end of the drive shaft, and one under the knurled inching knob.

- Remove the LEH from the post.
- .050" hex head wrench removes the set screw on the knurled knob, spin the knob off the shaft.
- Remove the two Phillips head screws on the bottom as shown.
- Spin out the drive shaft, flip it around and spin it back in.
- When you have the drive shaft almost all the way in, place spacer on shaft end, insert it into end cap.
- Add spacer on other shaft end and add the removable end cap.
- Screw in two Phillips head screws.


The Fore and Aft knob is very simple.

- Loosen the set screw, spin out the inching knob.
- Remove the plastic cap on opposite side and place the knob on the shaft, tighten set screws.
- Replace plastic cover on open hole.


**Upper Camera Platform /Lower electronics housing connectors.**

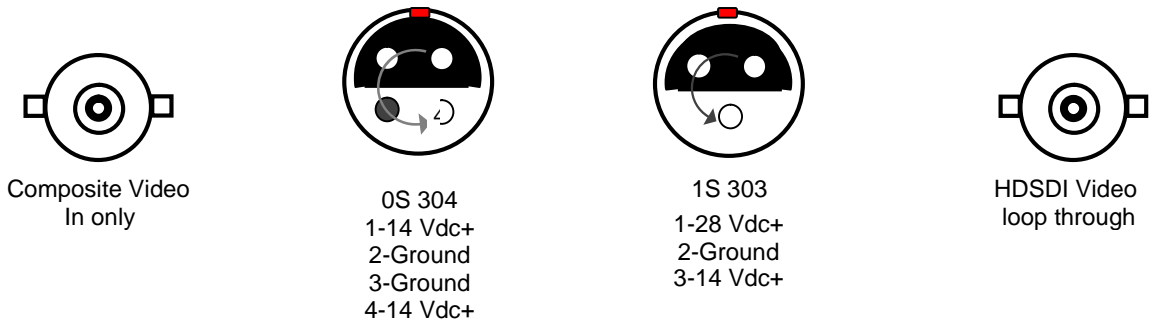


**Camera platform rear**

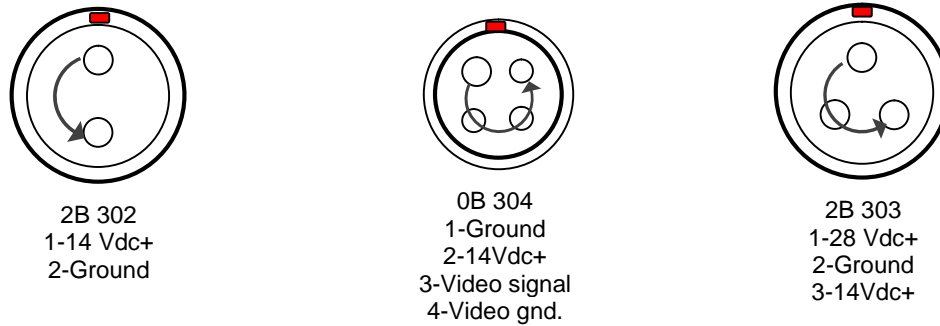


**Camera platform left side view**



**Camera platform right side**

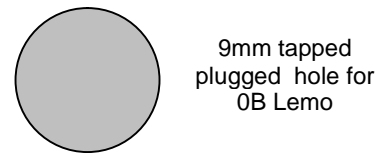


**Lower electronics housing front view**

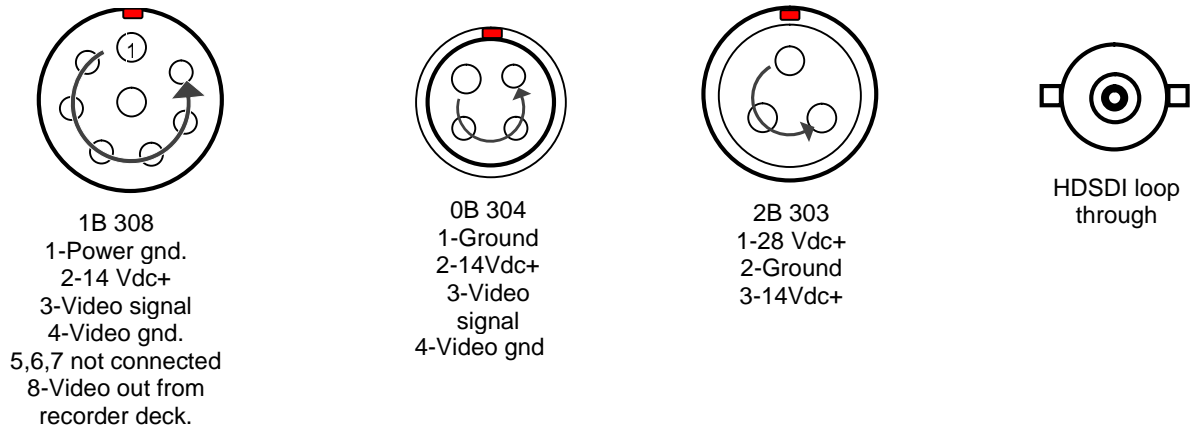


**Lower electronics rear view**

Toggle switch  
Records composite video  
Playback on pin 8 of the monitor connector




0B 306  
1-Power gnd  
2-Selectable Vdc+  
3-Video signal to monitor  
4-Video gnd. to monitor  
5-Video signal record deck  
6-Video gnd record deck





# **TB-6 WITH DUO DIGITAL FRAMELINER**

# Operations Manual

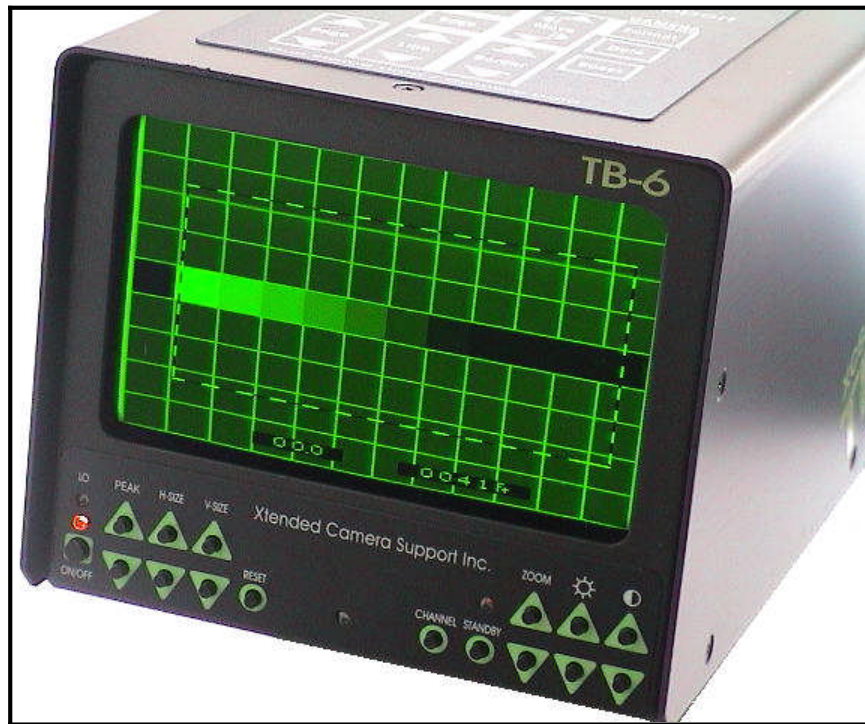

## **TB-6 Smart Monitor w/DUO Digital Frame Liner**

Rev. 6 / 2009  
Rev. J / software  
Rev. C / firmware

Xtended Camera Support, Inc.  
3976 Crossridge Court, Thousand Oaks, CA 91360 / Phone 805.531.0014

## **WARRANTY**

**Please read before using your TB-6**

Xtended Camera Support, Inc. warrants this product against defects in material and workmanship for a period of 1 year from date of purchase. XCS will pay parts and labor charges to repair or replace any manufacturer's defect. Buyer will be responsible for all shipping costs.

The manufacturer supplies a one-year warranty on the Cathode Ray Tube (CRT) against defects. This warranty does not cover cosmetic damage and damage done by acts of God, accident, misuse, abuse or negligence to the product.

Great care in the engineering and design of this product make for **NO SERVICEABLE PARTS INSIDE** the TB-6. We will no longer have to open it up to make adjustments.

This product meets all **FDA** (U.S. Food and Drug Administration) regulations.

**This unit complies with DHHS Radiation Performance Standards 21 CFR Subchapter J.**

Contact XCS for any and all repairs necessary.

Xtended Camera Support, Inc.  
3976 Crossridge Court  
Thousand Oaks, CA 91360  
Phone: 805-531-0014  
[GBubb@aol.com](mailto:GBubb@aol.com)

Any unauthorized repairs or modifications done to this unit will immediately void any and all warranties. If you at any time experience problems with your TB-6, call for an RMA and return it immediately for service.

## **INTRODUCTION**

### **WARNING AND PRECAUTIONS**

#### **PLEASE READ WARRANTY INFORMATION BEFORE USING THIS PRODUCT**

The TB-6 Smart Monitor is designed to be rugged and weather-resistant, but it can be damaged or cause injury if not used properly. Observe the following precautions to avoid personal injury and maximize the useful lifetime of the monitor.

- DO NOT attempt to remove the cover or service this equipment. The circuitry inside operates at 13,500 volts and can cause injury. There are no user adjustments inside this monitor.
- DO NOT use this monitor in locations subject to hazardous or explosive gases.
- DO NOT use caustic solvents or abrasive cleaners on any part of the monitor, especially the CRT face. The face of the CRT is treated with a special coating.
- The TB-6 is NOT waterproof. However, the monitor is designed for outdoor use and is weather-resistant. If used in damp environments, be sure to observe proper electrical safety precautions.
- DO NOT leave the monitor display at maximum brightness for prolonged periods. The useful lifetime of the CRT is extended considerably if the CRT brightness is modestly adjusted to levels appropriate for the surrounding conditions. When unattended, use the STANDBY mode to prolong the life of the CRT as well as your external battery.
- Unauthorized modification of any circuitry in this product may increase the risk of potential hazards and injury to the user, and will void all warranties.
- Never insert any screw longer than .25" into the monitor case. Breakage to the circuit boards or the CRT will definitely occur.

## **NORMAL OPERATION**

### **REAR PANEL CONNECTIONS AND CONTROLS**

#### **POWER CONNECTOR**

The standard TB-6 power connector is an 8 pin Lemo type. Pin 1 is Ground and Pin 2 is positive 12 volts DC. The monitor is designed to operate with 12 VDC battery systems and operates properly over a range of 11.8 to 18 VDC. The nominal current draw at 12 VDC under nominal image size and viewing conditions is approximately 1.3 Amperes. Power consumption will increase with increased CRT drive (brightness and/or contrast) and will also increase with increased image size, but will decrease with higher battery voltage. Currently, most battery manufacturers are using 14.4 volt, which will bring your nominal draw on the TB-6 to 1.08 Amperes. The current draw in the STANDBY mode is approximately 0.1 Amperes.

#### **REVERSE POLARITY PROTECTED**

The input power is protected with an internal, self-resetting fuse and diode. It will resume normal operation after the fuse returns to ambient temperature.

#### **VIDEO INPUT/OUTPUT**

The TB-6 monitor is designed to operate with composite video formats such as NTSC and PAL. The monitor provides two separate channels of video input on the Lemo connector. One channel of video looped through output from channel 1 on the BNC connector. The BNC connector can also be a composite video input on channel 1.

## VIDEO TERMINATION

One slide switch located on the rear panel selects between 75 ohm terminated or unterminated LOOP through for channel 1 only. The monitor should always be in the terminated position if you are not looping out of the monitor with a BNC cable into another terminated source. The monitor should be unterminated when looping a video signal out of the monitor into another terminated source.

## SWEEP REVERSAL

Two slide switches located on the rear panel select normal or inverted scan for both the horizontal and vertical sweep directions. The switches are located behind a sliding door to prevent their access unless the power connector is removed. **Always turn power to monitor OFF before switching the sweep reversal switches.**

## FRONT PANEL CONTROLS- Pushbutton

On power up, the monitor will resume operation as it was last configured. All controls that affect image size, brightness and contrast are independently memorized for each of the three video channels. Most controls are accompanied by an on-screen message and in most cases a graphical bar display to enhance user operation.

## POWER MAIN ON/OFF

The monitor's main power switch is a standard pushbutton switch.

## STANDBY

This pushbutton toggles the monitor into and out of STANDBY mode. The monitor must remain in STANDBY mode for two seconds before the operator can press the button to remove from standby mode. If you try to remove the monitor from the standby mode before this two second delay, the microprocessor will continually reset that two second delay time. This function will prolong the life of your tube. It is not to aggravate the operator. In this mode, the power draw of the monitor will be reduced at about 1/10<sup>th</sup> of the power draw when the STANDBY mode is OFF.

## CHANNEL SELECT

To activate the Channel select, continually hold down the button. After 1.5 seconds, the program will scroll through the three channels.

**Channel select button presets. See additional options available.** Press and hold the select button 1.5 seconds to initiate channel scroll.

**CHANNEL 1** – displays video input from the 8 pin Lemo connector or the BNC input. Signal is looped through to BNC connector on back.

**CHANNEL 2** – displays video signal input from 8 pin Lemo.

**CHANNEL 3** – displays internal gray scale and linearity pattern generator.

## HORIZONTAL SIZE (HSIZE)

Two up/down pushbuttons adjust the horizontal size of the currently displayed video channel.

## VERTICAL SIZE (VSIZE)

Two up/down pushbuttons adjust the vertical size of the currently displayed video channel.

## ZOOM

Two up/down pushbuttons adjust the overall image size by zooming in or out while maintaining the image aspect ratio.

## BRIGHTNESS

Two up/down pushbuttons adjust the monitor brightness.

## CONTRAST

Two up/down pushbuttons adjust the monitor contrast.

## PEAK

Two up/down pushbuttons adjust the electronic image enhancer of the monitor.

## RESET

Scrolls through four factory preset aspect ratios – 1.33, 1.66, 1.85, 2.40. Returns all monitor functions back to a factory preset condition.

## CHROMINANCE FILTER

For insertion or removal of the chrominance filter at any time when the monitor is on and video image is present, press and hold the PEAK DOWN button for 8 seconds. On screen will appear either F/ON or F/OFF (filter on or filter off). We recommend that you always leave the filter in the off position (F/OFF) for the maximum amount of image sharpness. Chrominance filters are very useful when using color video assist from film cameras that have poor resolution and large pixel formation on screen. It is used for blending the pixilated image smoothly and evenly, reducing the grainy image that some video assists can produce making it appear to have a more even contrast, but reducing the image sharpness.

## FRONT PANEL LED INDICATORS

The monitor has 3 yellow and 1 red LED indicators: POWER MAIN ON, POWER INPUT LOW, STANDBY ON, and 1 LED serves as a TALLY light, prompting the operator.

### POWER MAIN ON

Indicates the monitor is powered on.

### POWER INPUT LOW

When the input power level drops too low, typically below 11.2 VDC, the monitor's LO battery indicator will turn on.

### STANDBY ON

When the monitor is placed in the STANDBY mode, only the STANDBY LED indicator will turn on, and the display will be blanked. The power draw of the monitor will be reduced to about 1/10<sup>th</sup> of the power draw when the STANDBY mode is ON.

### CHANNEL SELECTED and NO VIDEO

There is on screen text that indicates each of the video channels. The channel that is selected for display, (channel 1, 2, or 3) will have its corresponding on-screen text indicator, that prompts you for one second. If there is no video active at that channel, the on-screen text indicator will blink NO VIDEO. To ensure the monitor is working correctly, scroll the channel select button to CHANNEL 3. The display should show the grayscale/linearity pattern.

## NTSC / PAL VIDEO FORMATS

The TB-6 Smart Monitor provides automatic signal recognition and setup for NTSC or PAL video formats (image synchronization and image size are automatically adjusted). Different formats can be connected to TB-6 video inputs simultaneously.

## STANDBY (Power Saver) FEATURES

### MANUAL OPERATION

When the TB-6 monitor is placed in the STANDBY (power saver) mode, the power draw of the monitor is reduced at about 1/10<sup>th</sup> of the power draw when the monitor is ON. However, the CRT filament remains powered to allow immediate use when brought out of the STANDBY mode. When the TB-6 is unattended, use the STANDBY mode to prolong the life of the CRT as well as your external battery.

### AUTOMATIC FEATURE

When the TB-6 monitor is ON (STANDBY mode OFF) and the video signal at the selected channel goes away, the monitor will automatically enter the STANDBY mode after 5 minutes

### SELECTING FACTORY PRESET ASPECT RATIOS

Factory preset aspect ratios are individually memorized for one of each of the three channels. For example, channel 1 could be 1.33, channel 2 could be 1.85, and channel 3 could be 1.66. You could also use this preset to quickly adjust the monitor back to a factory standard aspect ratio.

### SELECTING AN ASPECT RATIO

Select your video signal channel input 1, 2, or 3 (grayscale linearity pattern). While the image is displayed, push and hold the RESET button down. After two seconds, the monitor displays which aspect ratio is currently being viewed. While continuing to hold the RESET button down, every two seconds, the monitor will cycle through to the next aspect ratio. To select an aspect ratio, simply release the RESET button when your aspect ratio is displayed.

## STORING AND RECALLING “LEARNED” SETTINGS

The TB-6 monitor provides three non-volatile memory levels (USER, LEARNED AND FACTORY) to memorize the settings of the monitor.

### USER LEVEL

The USER level is always active and holds the settings that were last used for each of the 3 channels. This level is immediately activated upon power up.

### LEARN LEVEL

The monitor can also LEARN individual channel settings for later recall. LEARNed settings can only be recalled and/or adjusted when the desired channel is selected (1, 2, or 3) and the monitor is specifically placed in the LEARN mode.

#### To enter the LEARN mode:

Turn the monitor off, press and hold the STANDBY button down.

Turn the monitor on, while continuing to depress the STANDBY button.

The monitor will temporarily enter the STANDBY mode, but then will display the message “LEARN” after 3 seconds. The monitor is now in the LEARN mode and the settings that were previously learned are now displayed.

If recalling the previously learned setting is all that is needed, exit the LEARN mode by pressing the STANDBY button again.

Otherwise, any adjustments made while in the LEARN mode are stored in the LEARN level of non-volatile memory. This includes any adjustments that are made in the vertical, horizontal or zoom image size including brightness and contrast. It is best to leave the monitor in its current LEARNed mode.

Upon exiting the LEARN mode, the learned settings are also saved to the USER level of memory.

## TOP EDGE BLANKING

While in the LEARN mode, the top edge of the video image (TOP blanking) can be adjusted by using the PEAK select pushbuttons. You can move the top edge using the up/down arrows respectively.

## RESTORING ALL CHANNELS TO FACTORY SETTINGS

The TB-6 monitor can be restored to the original FACTORY settings. This action may be desirable if the monitor does not appear to be operating correctly, or as a quick and convenient way to reset all of the LEARN and USER settings stored in non-volatile memory.

### To reset the TB-6 Smart Monitor to the original FACTORY SETTINGS:

- 1) Turn the monitor OFF.
- 2) While holding the RESET button down, turn the monitor ON and continue to hold the RESET button down.

The monitor will power up at the FACTORY settings and after 5 seconds display the message "RESET". A few seconds later a countdown starting at 5 will commence. Continue to hold the RESET button until the message "DONE" appears.

At this point, the FACTORY settings have been restored and you may release the RESET button. If you release the button before the "DONE" message appears, the RESET process will be aborted and the monitor will return to its last used state.

## CLEANING

DO NOT clean the TB-6 while plugged in or turned on.

DO NOT immerse in water or any liquid.

DO NOT use caustic solvents or abrasive cleaners on any part of the monitor, especially the CRT face. The CRT surface of the TB-6 monitor has an optical coating that should be cleaned with a clean, soft cloth and ordinary household window cleaner.

The TB-6 housing is a tough .06 hard coat anodized aluminum that can be cleaned with a mild soap solution. **DO NOT use solvents such as acetone or alcohol.** This will melt the DUO Digital Frame Liner keypad and remove all silk screening.

## DO NOT REMOVE CERTIFICATION NUMBERS

**It is important to note that ALL monitors that emit radiation are regulated and certified by the FDA. We at Xtended Camera Support, Inc. must follow these regulations to the letter. If the FDA certification number is removed from this monitor, the FDA or U.S. Customs officials have the authority to seize this component and ALL related components. For your mental and physical health, we strongly recommend you DO NOT remove any certification numbers or warnings on this product.**

We also recommend you do not use any products that are not FDA certified. It is mandatory upon certification that you print it on the outside of the case, visible to all.



## TB-6 SPECIFICATIONS

### Physical Specifications

|                    |  |
|--------------------|--|
| Enclosure Size:    | 5.9" W x 4.9" H x 9.25" d  |
| CRT Size:          | 5.70" diagonal   |
| Viewable CRT Area: | 4.6" W x 2.8" H  |
| CRT Color:         | Green  |
| Weight:            | 4.9 lbs.   |
| Housing:           | 0.060" Aluminum  |
| Housing Finish:    | Black hard coat anodized   |
| Hood:              | 3-sided .25"   |
| Mounts:            | (5) 6-32 UNF pems on the bottom  |
| Ventilation:       | Due to high efficiency electronics, ventilation is not required.   |
| Input Plugs:       | 8 pin Lemo 1B chassis provides two channels of Video in.<br>Monitor power / ground<br>Additional tally light input   |
| BNC Connector:     | One BNC connector serves as video loop through on CHANNEL 1 or Input.  |
| Tally Light:       | 3.5mm mono mini plug. Senses voltage input from the camera switcher via the tally light output connector on the video camera. Voltage range is 1.5-30 volts D.C. |

### Electrical / Performance Specifications

|                     |  |
|---------------------|--|
| Power Input:        | 10.4 to 18 VDC. 12 VDC nominal   |
| Power Draw:         | Approximately 1.3 Amp (typical brightness)<br>Approximately 1.5 Amp (maximum brightness)<br>Approximately 0.1 Amp (STANDBY mode)   |
| Video Input:        | 2 Channels, Composite NTSC/PAL formats.<br>Channel 1 is 75 ohm or loop-through selectable.<br>Input through 8 pin Lemo connector or BNC<br>Channel 2 is video input only through the 8 pin Lemo connector. |
| CRT Data:           |  |
| Resolution:         | 800 TV lines (measured by shrinking raster method)   |
| Brightness:         | 600 Foot Lamberts peak white   |
| Video Bandwidth:    | 10 Mhz nominal   |
| Chrominance Filter: | NTSC / PAL   |
| Front Controls:     | MAIN POWER ON/OFF<br>PEAK (incr/decr)<br>STANDBY mode ON/OFF<br>H SIZE (incr/decr)<br>V SIZE (incr/decr)<br>ZOOM (incr/decr)<br>BRIGHTNESS (incr/decr)<br>CONTRAST (incr/decr)                             |
| Rear Controls:      | 75 ohm / LOOP selection for video channel 1  |
| Horizontal Sweep:   | NORMAL/INVERT  |
| Vertical Sweep:     | NORMAL/INVERT  |
| Tally Input:        | 3.5 mm mono mini plug  |

## TROUBLE SHOOTING

| PROBLEM                                | CHECK or TRY . . .   |
|--|--|
| No Picture and/or<br>No LED indicators | Power source.<br>POWER ON/OFF switch.<br>Monitor power cable.<br>Monitor battery.  |
| No Picture but<br>POWER indicator ON   | Video iris or camera shutter in closed position?<br>Increase BRIGHTNESS.<br>Increase CONTRAST.<br>Check STANDBY button.<br>Do a factory reset.   |
| No Picture,<br>STANDBY indicator ON    | Exit STANDBY mode.   |
| "NO VIDEO CH x"<br>message appears     | Correct CHANNEL selected?<br>Faulty video cable.<br>Video source. To check correct monitor operation,<br>scroll CHANNEL button to grayscale. If you have<br>an image, the monitor is fine.<br>Check to make sure video camera is turned on.<br>Remove any multiple video terminations that may be<br>present.  |
| Picture Scrolls                        | NTSC / PAL video type?<br>Try RESET (Chapter 3)  |
| Picture is too dim or too bright       | Adjust BRIGHTNESS.<br>Adjust CONTRAST.<br>Video iris.  |
| Picture size is wrong aspect<br>ratio  | Press and hold RESET button down to bring the<br>image to correct aspect ratio.<br>Adjust HSIZE, VSIZE, and/or ZOOM.<br>Make sure video assist optics are set up for correct<br>aspect ratio.<br>Make sure film cameras have the correct ground glass<br>markings.<br>RESET factory settings (Chapter 3)   |
| Picture size too big or too<br>small   | Adjust ZOOM.<br>Check video tap image size.<br>Correct video optics for camera?  |
| Picture is inverted                    | Disconnect power connector, select proper sweep<br>direction.<br>Check video tap.  |
| Video Framelines jittering,<br>tearing | Check termination at the back of the monitor, make<br>sure monitor is in terminated position.<br>Possibly too many terminations in the sled, unplug or<br>unterminate all video components. (transmitter,<br>on-board deck) This will help verify if it is a low<br>video signal output from the camera or caused by<br>the sled.<br>If using a color camera, flip color camera to B/W<br>mode. Video camera could be misadjusted<br>causing the chrominance to bleed into the control<br>track of the video sync. |

## OPTIONS

XCS does not provide a spirit level for this monitor. We have, however, provided two 4-40 UNC Pems (threaded holes) on the faceplate. They are located approximately 0.55" above the "RESET" and "CHANNEL" pushbuttons, under the graphic overlay. The distance apart is 1.625" O.C. Rub the overlay with your finger to find the indent of the holes, and then use a small pin to poke the holes.

We recommend a company called:


Geier & Bluhm, Troy, NY 518-272-6951, ask for part #4-2093.

They custom make what we consider the best vertical faceplate mount spirit level. This level is made specifically for the TB-6 Smart Monitor.

**Remember: the maximum screw depth should not exceed .25"**

## REAR PANEL PIN CONFIGURATION

### REAR VIEW

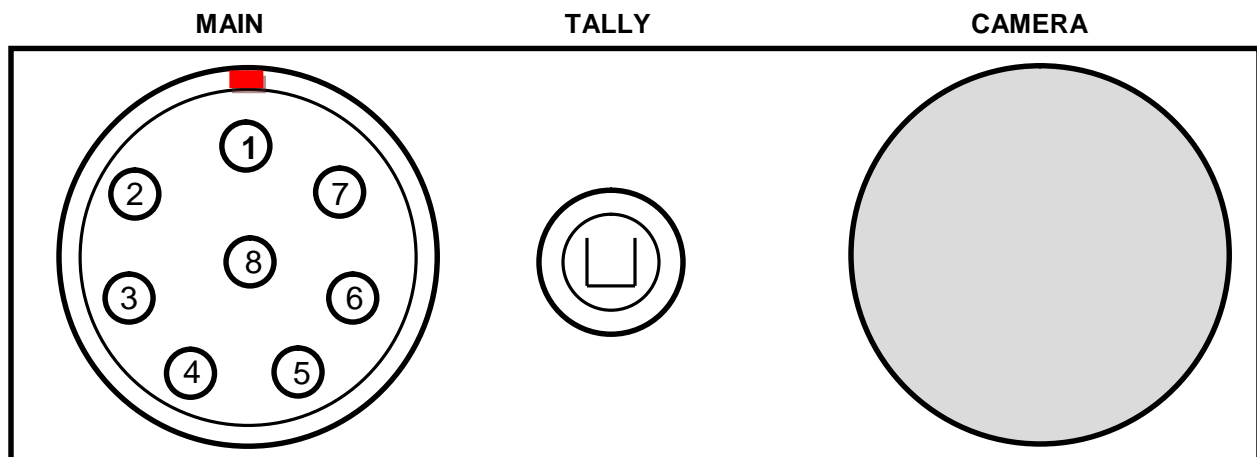

### MAIN POWER, VIDEO & TALLY INPUTS

#### EGG 1B 308

- 1 – 12 VDC power ground
- 2 – 12 VDC power positive
- 3 – Video signal input channel 1
- 4 – Video signal ground channels 1 & 2
- 5 – Tally positive
- 6 – Tally negative
- 7 – Tachometer
- 8 – Video signal channel 2

#### Tally

##### 3.5mm mono mini jack


Tip – Tally positive

Sleeve – Tally negative

**Camera: This connector has been removed**

## REAR PANEL SLIDE SWITCHES / BNC

### FRONT VIEW

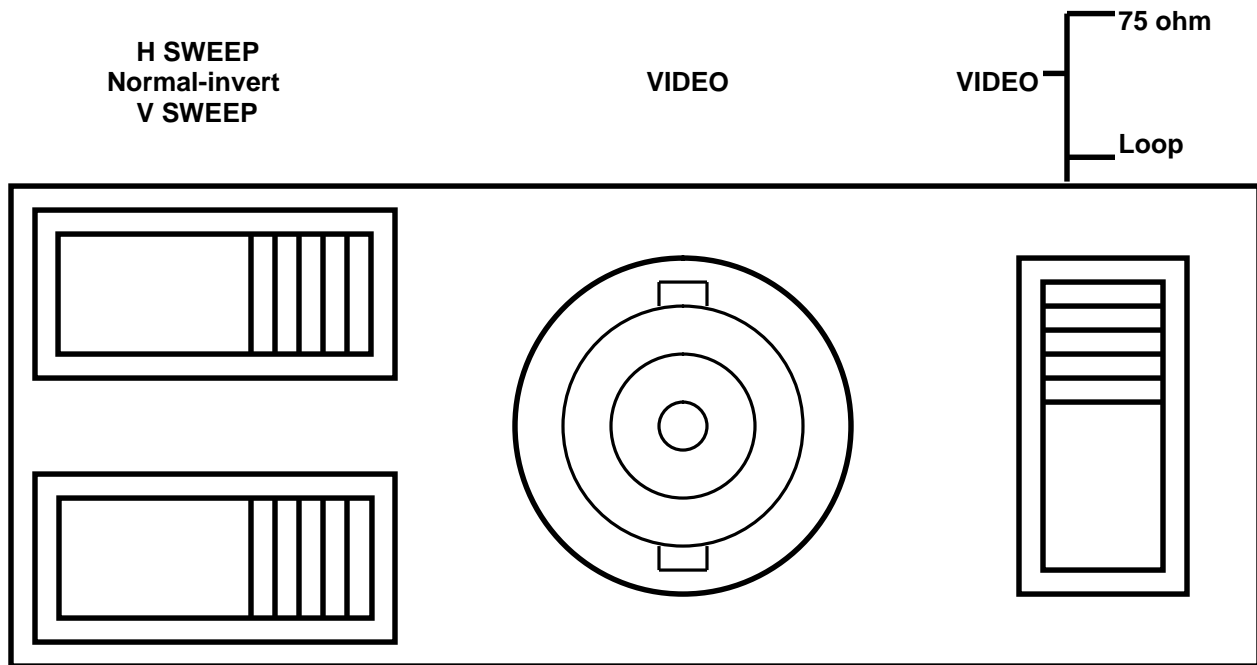

#### **H SWEEP / V SWEEP**

Horizontal and vertical image sweep controls. Allows user to flip the video image. You must always power your monitor down before you reverse the image.

#### **VIDEO BNC Connector**

BNC connector allows for signal input or loop through output only on CHANNEL 1. CHANNEL 2 is a 75 Ohm terminated signal input only, available through the 8 pin Lemo connector.

#### **75 Ohm Termination Switch**

Allows user to terminate or unterminate video signal on CHANNEL 1 only.

## **DUO FRAMELINE GENERATOR (Optional)**

### **ON SCREEN DATA**

|                            |  |
|----------------------------|--|
| Frame rate:                | 3-300 f.p.s. with 3 digit resolution.                |
| Film counter:              | 4 digits, feet or meters.                            |
| “LoBAT”:                   | Battery Indicator.                                   |
| Single or Duo frame lines: | Solid black lines or zebra lines.                    |
| Border Control:            | 8 steps from solid black border to 100% video image. |
| Off speed indicator:       | Triggers at $\pm$ 4% of current running speed.       |
| Page numbers:              | 1-8 individually programmable pages.                 |

### **KEYPAD CONTROLS ON TOP OF MONITOR (Pressure Sensitive)**

|                     |  |
|---------------------|--|
| ON, DUO, OFF:       | Selects single, dual or no frame lines.  |
| PAGE:               | Scrolls up or down through the 8 programmable pages.   |
| LINE:               | Increases or decreases frameline intensity 0-100% of peak white in 8 steps.  |
| BORDER:             | Increases or decreases the video level outside the single frame line. Selectable from 0-100% in 8 steps  |
| EDIT:               | Allows the user to enter and exit the programming mode.  |
| EDIT, EDGE, MOVE:   | Pressing the three buttons in sequence allows editing of displayed frame lines. Press EDIT again to exit programming mode.   |
| DATA:               | Activates or deactivates the camera functions displayed. When the display is hidden, the DUO will still monitor the camera functions and keep track of the camera functions. (Camera data cable must be connected).  |
| RESET:              | Held down for two seconds zeros the footage. Pressing again for three seconds resets to last counter display. Counts up to 9999 feet or meters.  |
| EDIT, FORMAT, MOVE: | Pressing the three buttons in sequence, allows positioning of on screen camera data Up or Down. Display will always be outside of the frame lines.<br><br>Pressing the FORMAT button a second time, allows the user to select the film format: 16, 35, 65mm.<br><br>Pressing the FORMAT button a third time, allows the user to select the correct cycles per frame: 50/F, 100/F, 150/F, 200/F, 250/F<br><i>See camera specifications chart for the recommended setting.</i><br><br>Press the FORMAT button a fourth time to select either feet or meters.<br><br>Press EDIT to exit the programming mode. |

## **GETTING STARTED**

Make sure you have a video signal present and power to your TB-6 monitor

Turn on your TB-6. You should have a video image from your camera or turn TB-6 to channel 3. This is the internal pattern generator. Press the **ON/DUO/OFF** button on your monitor. This will display a single, double or turn OFF the on screen frame liner (DUO).

Whatever was last programmed into the **DUO** will be displayed when you press the yellow **ON/DUO/OFF** button. On the monitor, you will see the **DUO** display one, two, or no framelines. What you also may notice for two seconds in the middle of the monitor screen is a numerical display. This number is telling the user what page (1-8) that the user is on and will be editing. You have 8 selectable pages.

So let's start programming the frame lines. If you wish at this time, hit the **DATA** button and turn the camera data off screen, if you don't wish it to be visible.

- To edit the framelines to match your ground glass, simply press the **EDIT** key once. The left frameline is blinking. The blinking frameline tells the user you are in the **DUO's EDIT** mode and are moving that specific frameline. To move the frameline, simply use the **MOVE** keys to adjust position.
- After positioning the left frameline, press the **EDGE** button, this will activate the right frameline. It will be blinking telling the user it is ready to be positioned. Using the same **MOVE** buttons for positioning the frameline, repeat the step for the top and bottom lines.
- To exit all programming modes, press the **EDIT** key. The **EDIT** key always gets you in and out of programming mode. Just remember, anything blinking on screen tells you that you are in **EDIT** mode and the blinking item is to be edited.
- You must always exit the **EDIT** mode.

If you wish to increase or decrease the frameline intensity, you can at any time, press the **LINE** button arrows up or down.

If you wish at any time to increase or decrease the border gain level (in single frame mode) you would simply press the **BORDER** arrows up or down.

*The same process could be used on pages 2-8 if the user wishes.*

## **SETTING UP THE DUO'S DATA DISPLAY FOR A CAMERA**

All that is needed is the correct camera cable from the **DUO's** seven pin Lemo connector to the camera or sled (tachometer cable), and a little programming.

- First, be sure you have turned the **DUO** frameliner on, by turning on your TB-6. Make sure you have a video signal present, or turn your monitor to channel three.
- To set up the film format (65, 35, 16mm), press the **EDIT** button. You will see the page number you are editing, and the left frameline will be blinking. At this time, press the **FORMAT** button once, the **DUO** will display two arrows, one up/one down, in the data box at the right on the screen. The **MOVE** button allows you to position the data boxes up or down, outside of the bottom frameline. The display will not enter the framed picture area.
- Press the **FORMAT** button a second time, while still in the edit mode, and it displays the film formats – 16, 35, 65mm. Choose the desired format by pressing the **MOVE** button up or down.
- Press the **FORMAT** button a third time, and the display shows the cameras Cycles Per Frame setting. 50/F, 100/F, 150/F, 200/F, 250/F.  
Use the **MOVE** button to cycle through the settings until the setting you want appears. There is a list of cameras and settings at the end of this manual.
- Pressing the **FORMAT** button a fourth time, allows the user to select Feet/Meters using the **MOVE** button.
- Press the **EDIT** button to exit the programming mode. Remember, each page is stored into nonvolatile memory, so you can remove all power to the unit including the battery and it will retain all programs.

The **LoBAT** indicator will appear in the right corner data box alternating with the current display, indicating low battery power. Once you have set up the film format (16, 35, 65mm) and cycles per frame (/F), this program is transparent to all pages. **This memory carries over to all pages of the DUO's memory.** It is important to choose both the correct film format and cycles per frame to obtain the correct camera readings.

## **MORE FEATURES**

The **DUO**, when connected to a film camera, automatically monitors and displays the cameras current running speed and footage counter. Plus, it will warn the user if the camera is running off speed or has low voltage.

The monitoring range is 3 to 300 F.P.S If the **DATA** information is turned off, but plugged into the camera, it will still monitor the frames per second, footage counter, camera running speed and off speed indicator in "Hide Mode". If the camera runs off speed or runs low on camera power, it will automatically turn on screen warning you of a potential problem.

### **SELECTING FACTORY PRESET ASPECT RATIOS**

Factory preset aspect ratios are individually memorized for one of each of the three channels. For example, channel 1 could be 1.33, channel 2 could be 1.85, and channel 3 could be 1.66. You could also use this preset to quickly adjust the monitor back to a factory standard aspect ratio.

### **SELECTING AN ASPECT RATIO**

Select your video signal channel input 1, 2, or 3 (grayscale linearity pattern). While the image is displayed, push and hold the RESET button down. After two seconds, the monitor displays which aspect ratio is currently being viewed. While continuing to hold the RESET button down, every two seconds, the monitor will cycle through to the next aspect ratio. To select an aspect ratio, simply release the RESET button when your aspect ratio is displayed.

The **RESET** button serves two functions. First, if the user holds the button down for two seconds, it will reset the footage counter to "0000". Second, if you haven't run the camera, but you have already reset the counter to "0000", you may recall the previous footage count by holding the **RESET** button down for 3 seconds.

### **SPECIFICATIONS:**

|                    |  |
|--------------------|--|
| VIDEO INPUT        | Composite video (NTSC)<br>1 volt P-P @ 75 ohms   |
| TEMPERATURE RANGE  | 0°F - 125°F                                      |
| POWER CONSUMPTION  | 30 Milliamps                                     |
| LO BATTERY         | 10.4 Vdc 12 volt camera systems                  |
| THRESHHOLDS        | 21.0 Vdc 24 volt camera systems                  |
| CIRCUIT PROTECTION | Auto reset, reverse polarity, overload (DC only) |

### **RECOMMENDED CAMERA SETTINGS/F (CYCLES PER FRAME)**

|                   |   |
|-------------------|---|
| <b>AATON</b>      | ALL MODELS – 100/F  |
| <b>ARRIFLEX</b>   | ALL MODELS – 200/F<br>EXCEPT 16 HIGH SPEED WITH CEI SPEED CONTROL – 50/F  |
| <b>MOVIECAM</b>   | ALL MODELS – 200/F  |
| <b>PANAVISION</b> | R200 – 200/F<br>G/GII – 200/F<br>PLATINUM – 100/F<br>STAR – 100/F UNDER 50 F.P.S.<br>50/F OVER 50 F.P.S.<br>STAR II – 250/F |

### **Incorrect cycle per frame settings on will cause incorrect camera readings in the monitors data box.**

Cycles per frame settings are to camera manufacturers factory specifications. However, after market camera modifications may effect tachometer (cycles per frame) output. Therefore, if a questionable FPS reading appears on the screen, refer to the formula and examples below to reprogram the correct cycles per frame setting on the DUO. If no readings appear in either the footage counter or tachometer data box, the tachometer output has been removed or reassigned to a different pin.

|       |  |   |                              |                                |
|-------|--|---|------------------------------|--------------------------------|
| Ex. 1 | <u>12 fps</u> (data box reads)<br>24 fps | X | 50/f f (current data above)= | 100/f (correct setting on DUO) |
| Ex. 2 | <u>6 fps</u> (data box reads)<br>24 fps  | X | 50/f f (current data above)= | 200/f (correct setting on DUO) |

THE  
**ULTIMATE**  
**SLED**  
BY  
XCS INC.